


Product Data Sheet



GSF Bond-Aid is specifically designed to provide strong bonding properties on the solid surface structures and interior surface of gypsum or other plaster-based wall coating. Bond-Aid has a combination of ingredients that helps to form a strong surface and also enhance the bonding capabilities. You do not need any special treatment to be done before the application of Bond-Aid. Bond-Aid produces a layer for the treatment of surfaces that acts as a high-performance bonding agent for gypsum or sand cement plaster after the application on smooth surface. Bond-Aid is used to add tensile bond strength to smooth surfaces while carrying out Gypsum Plastering. This is done by suspending the Co-Polymers in a unique Chemical solution to ensure both Chemical and Mechanical Bonding.


Technical Specification

Film Characteristics	Sky granular flexible
Appearance	Sky
Tensile Bond Strength	>2 MPA
Coverage	Approx. 50 sqft / Kg
Chemical Composition	Plymer based liquid

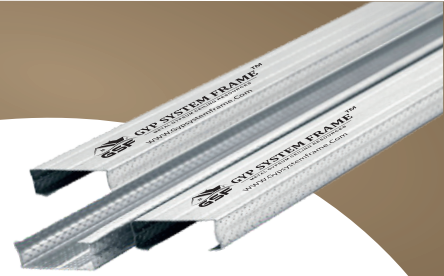

Product Data Sheet

Product Data Sheet



SINGLE COAT
APPLICATION



COARSE & LIQUID
PARTICLE BONDING



24 HOURS
DRYING TIME



SUITABLE FOR GYPSUM &
SAND CEMENT PLASTER



LARGE
COVERAGE AREA

Packaging & Branding

GSF Bond-Aid is stored in a plastic bucket labeled with the product name, features, application methods, expiry date, address, and safety guidelines.

Size

It is available in 20 Kg, 10 Kg, 5 Kg, and 1 Kg buckets.

APPLICATION METHOD FOLLOW 3 EASY STEPS FOR APPLICATION



1 OPEN & STIR THE
CHEMICAL PROPERLY



2 APPLY WITH A PAINT
BRUSH OR ROLLER



3 DRY FOR 24 HOURS. SURFACE
READY FOR PLASTERING

Caution

- Wash Gently With Water after use of material.
- Keep away from eye contact, incase of eye contact wash thoroughly with water.
- In case of emergency kindly seek advice from Doctors.